




Andreas Weigel (Autor)
**Forwarding Strategies for 6LoWPAN-Fragmented IPv6
Datagrams**

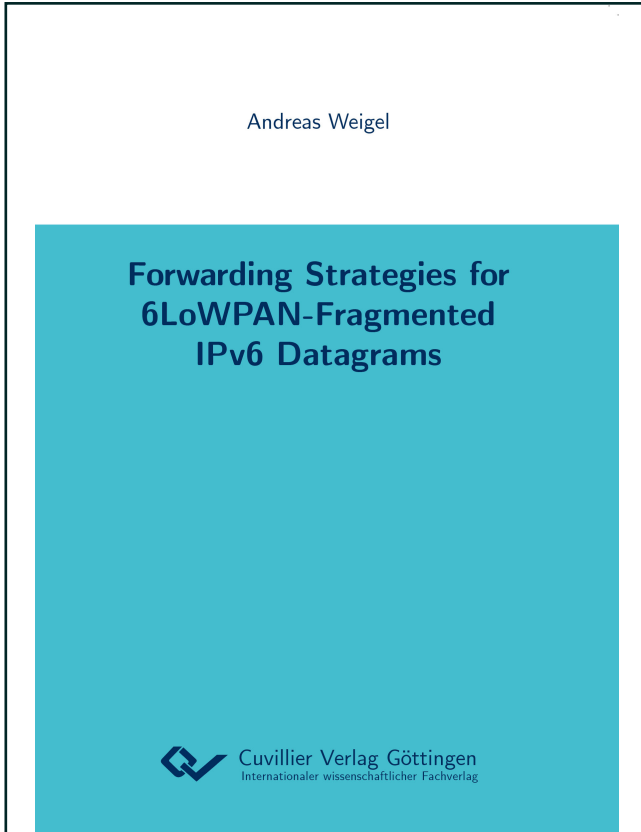

<https://cuvillier.de/de/shop/publications/7672>

Copyright:

Cuvillier Verlag, Inhaberin Annette Jentzsch-Cuvillier, Nonnenstieg 8, 37075 Göttingen, Germany
Telefon: +49 (0)551 54724-0, E-Mail: info@cuvillier.de, Website: <https://cuvillier.de>



Contents

1	Introduction	1
2	Problem Statement	5
2.1	IEEE 802.15.4	5
2.2	6LoWPAN	6
2.2.1	Compression and Fragmentation	6
2.2.2	6LoWPAN Routing Schemes	8
2.2.3	Basic Route-Over Forwarding Techniques	8
2.2.4	Adjacent Protocols	9
2.2.5	LFFR	11
2.2.6	6TiSCH	11
2.3	Applications	11
2.4	Energy Availability	12
2.5	Goals of Evaluation	13
3	Analytic Model for 6LoWPAN-Fragmented Forwarding	15
3.1	Motivation and State of The Art	15
3.1.1	Motivation	15
3.1.2	State of the Art	16
3.2	Model	17
3.2.1	Link-Layer Model	17
3.2.2	Multi-Hop Model	18
3.3	Evaluation	21
3.3.1	Persistent vs. Non-Persistent	21
3.3.2	Multi-Hop Transmissions	22
3.3.3	Additional Bits in Direct Mode	23
3.4	Conclusions	24
4	Simulation Model and Environment	27
4.1	Frameworks and Tools	27
4.1.1	OMNeT++	27
4.1.2	MiXiM	28
4.1.3	CometOS	29
4.2	Physical Layer Model	29
4.2.1	Available Models for Wireless Sensor Networks	29
4.2.2	Choosing an Appropriate Model	31
4.2.3	A Measurement-Based Physical Layer	31
4.3	Automated Model Creation	34
4.3.1	Topology Monitor	34
4.3.2	Post-Processing	35



4.4	Confidence Intervals	38
5	Basic Forwarding Techniques for 6LoWPAN-Fragmented Datagrams	39
5.1	Related Work	39
5.2	Modes	41
5.2.1	Enhanced Direct Modes	41
5.2.2	Retry Control	42
5.3	6LoWPAN Implementation	42
5.4	Experiment Setup	44
5.4.1	Testbed	44
5.4.2	Simulation	47
5.4.3	Network Topologies	48
5.4.4	Traffic	50
5.4.5	Link Layer Configuration	50
5.5	Evaluation	51
5.5.1	First Set of Experiments	51
5.5.2	Second Set of Experiments	56
5.5.3	Explanation of Results	58
6	Hardware-Assisted IEEE 802.15.4 Transmissions	61
6.1	Hypothesis	61
6.2	Capturing Node State in Real-Time	62
6.3	Experiment Setup	64
6.4	Evaluation	66
6.4.1	Direct Mode	66
6.4.2	Direct-ARR Mode	68
6.5	Conclusions	70
7	Basis Forwarding Techniques Revisited – a Parameter Study	73
7.1	Experiment and Simulation Setup	73
7.1.1	Testbed	73
7.1.2	Simulation	74
7.2	Validation of RS-C	75
7.2.1	PRR	75
7.2.2	Drop Causes – 6LoWPAN Layer	76
7.2.3	Drop Causes – Link Layer	77
7.3	6LoWPAN Forwarding Modes and IEEE 802.15.4 Parameters	79
7.3.1	macMaxFrameRetries	81
7.3.2	macMinBe	82
7.3.3	macCcaMode	84
7.3.4	macMaxBe	86
7.3.5	UDP packet size L_{UDP}	86
7.3.6	Latency	90
7.3.7	Pull-Based Collection	90
7.4	Summary	91
8	6LoWPAN Ordered Forwarding - 6LoOF	93
8.1	The 6LoOF Mechanism	93



8.1.1	Snooping	94
8.1.2	Probing	94
8.1.3	6LoOF Definition	96
8.2	Implementation	105
8.3	Experiment setup	106
8.3.1	Testbeds	106
8.3.2	Memory Usage	111
8.3.3	Simulation Environment	113
8.4	Evaluation: 6LoOF vs Plain Forwarding	113
8.4.1	6LoOF Parameters	113
8.4.2	TB-IoT Experiments	118
8.4.3	TB-D Experiments	123
8.4.4	Simulation	126
8.4.5	Summary	137
9	Conclusion and Outlook	139
	Bibliography	143