




Przemyslaw Bronowicki (Autor)
**Stability of Free Surface Flows in Capillary Channels
with Rectangular Cross-Sections**

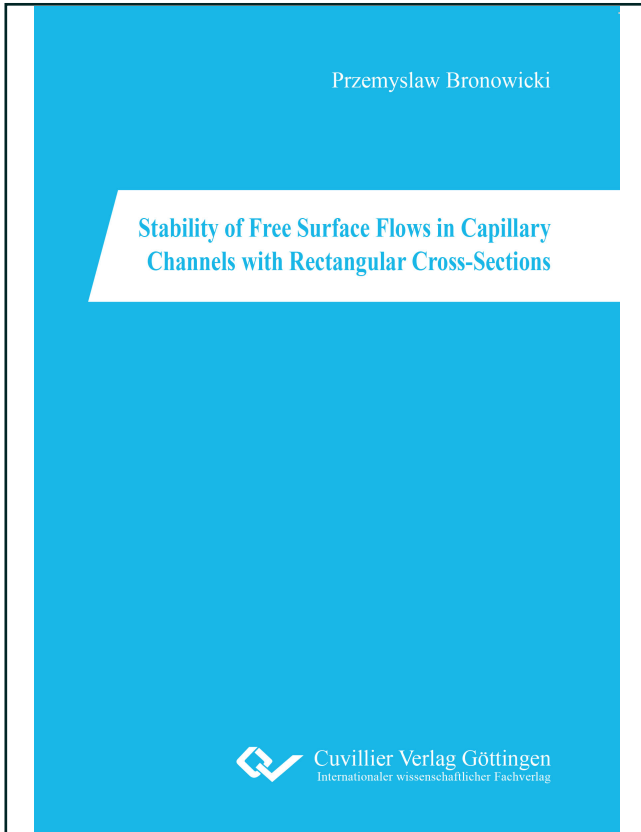

<https://cuvillier.de/de/shop/publications/7664>

Copyright:
Cuvillier Verlag, Inhaberin Annette Jentsch-Cuvillier, Nonnenstieg 8, 37075 Göttingen,
Germany
Telefon: +49 (0)551 54724-0, E-Mail: info@cuvillier.de, Website: <https://cuvillier.de>



Contents

| | |
|---|-----------|
| List of Symbols | xv |
| 1 Introduction | 1 |
| 1.1 Motivation and Background | 3 |
| 1.2 Scope of this Work | 4 |
| 2 State of the Art | 5 |
| 2.1 Propellant Management Devices | 5 |
| 2.2 Current State of Understanding | 7 |
| 2.3 Open Channel Flow Stability Criteria | 11 |
| 2.3.1 Flow Rate Limitation of Steady Flow | 12 |
| 2.3.2 Flow Rate Limitation of Unsteady Flow | 14 |
| 2.4 Limitation of Ground Based Experiments | 15 |
| 2.5 Experiments in Microgravity | 16 |
| 2.6 Capillary-driven Flow in Terrestrial Applications | 17 |
| 2.7 Computational Fluid Dynamics | 18 |
| 2.7.1 Interface Tracking | 19 |
| 2.7.2 Two-Phase Simulations With OpenFOAM | 20 |
| 3 Modeling the Flow in the Capillary Channel | 23 |
| 3.1 Basic Equations | 26 |
| 3.2 Modeling of the Free Liquid Surface | 27 |
| 3.3 Pressure Losses | 32 |
| 3.4 Dimensionless Model | 36 |
| 3.5 Transient Flow Stability Model | 40 |
| 3.5.1 Transient Stability Limit | 41 |
| 3.5.2 Augmented Stabilization (Flexibility Effect) | 42 |
| 3.5.3 The Feedback Effect of the Fluid Loop | 43 |
| 3.5.4 Formulation of the Transient Stability Model | 43 |



| | | |
|----------|---|------------|
| 4 | CCF Experiment on ISS | 47 |
| 4.1 | Experimental Setup | 48 |
| 4.1.1 | Hardware | 48 |
| 4.1.2 | Image Acquisition and Evaluation | 53 |
| 4.1.3 | Software | 54 |
| 4.2 | Operational Scenarios | 55 |
| 4.3 | Experimental Uncertainties | 57 |
| 4.4 | Experiment Summary | 57 |
| 5 | Numerical Tools | 61 |
| 5.1 | ccFlow (One-dimensional) | 62 |
| 5.2 | OpenFOAM (Three-dimensional) | 65 |
| 6 | Steady Flow Results | 69 |
| 6.1 | Stable and Unstable Flow | 69 |
| 6.2 | Critical Flow Rate | 73 |
| 6.2.1 | Influence of the Flow Development State | 76 |
| 6.2.2 | Influence of the Characteristic Numbers | 77 |
| 6.3 | Free Surface Contours | 78 |
| 6.3.1 | Reproducibility | 81 |
| 6.3.2 | Comparison with the Mathematical Model | 86 |
| 6.3.3 | Minimum Contour Point | 90 |
| 6.3.4 | Parametric Study | 92 |
| 6.4 | Weaknesses of the Mathematical Model | 92 |
| 7 | General Behavior of Free Surfaces | 95 |
| 7.1 | Static Solution | 95 |
| 7.2 | Dynamic Solution | 100 |
| 7.2.1 | Flow Rate Variation | 100 |
| 7.2.2 | Channel Length Variation | 104 |
| 7.3 | Physical Flow Regimes | 106 |
| 8 | Transient Flow Results | 111 |
| 8.1 | Stability Diagrams | 114 |
| 8.1.1 | Scaling of the Stability Diagrams | 117 |
| 8.2 | Parametric study | 117 |
| 9 | Three-Dimensional Computations | 121 |
| 9.1 | Flow In Straight Tube - Solver Validation | 122 |



| | |
|--|------------|
| <i>CONTENTS</i> | xiii |
| 9.1.1 Computational Domain | 122 |
| 9.1.2 Results | 124 |
| 9.1.3 Conclusions | 126 |
| 9.2 Flow in the CCF Setup | 127 |
| 9.2.1 Computational Domain | 127 |
| 9.2.2 Results | 131 |
| 10 Conclusions | 139 |
| A CCF Experiment | 145 |
| A.1 Test Fluid | 145 |
| A.2 Software | 146 |
| B CCF Experiment Results | 149 |
| B.1 Critical Flow Rate | 149 |
| B.2 HSHR Camera Images | 152 |
| B.3 MSG Camera View | 152 |
| B.4 Symmetry in the Free Surface Contours | 153 |
| B.5 Flexibility Function - Transient Stability Model | 153 |
| C ccFlow Results | 159 |
| C.1 Critical Flow Rate | 159 |
| D OpenFOAM | 163 |
| D.1 simpleFOAM Input Files - Cylindrical Tube | 163 |
| D.2 Cluster - Technical Specification | 167 |
| D.3 Velocity Distribution | 167 |
| List of Figures | 169 |
| List of Tables | 179 |
| Bibliography | 183 |