




Catharina Knieke (Autor)

Fracture at the Nanoscale and the Limit of Grinding

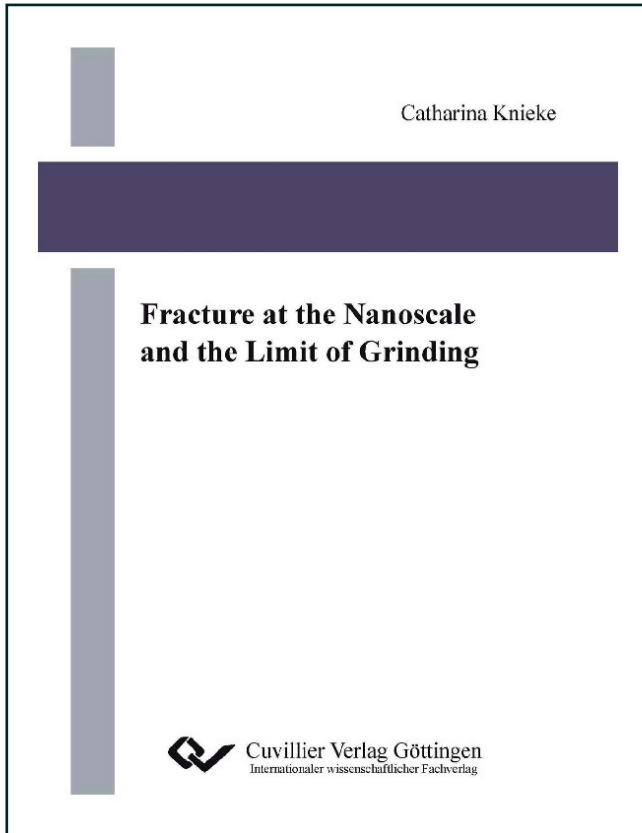

<https://cuvillier.de/de/shop/publications/37>

Copyright:

Cuvillier Verlag, Inhaberin Annette Jentsch-Cuvillier, Nonnenstieg 8, 37075 Göttingen,
Germany

Telefon: +49 (0)551 54724-0, E-Mail: info@cuvillier.de, Website: <https://cuvillier.de>



Contents

Nomenclature	9
1. Introduction	17
2. State of the Art	19
2.1. Ultrafine grinding in stirred media mills	19
2.2. The limit of grinding	20
2.3. Graphene - properties and production methods	26
3. Theoretical Background	31
3.1. Wet grinding with stirred media mills	31
3.1.1. Fundamentals in stirred media milling	31
3.1.2. The concept of stress energy and stress number	32
3.1.3. Stabilization methods	34
3.2. The particles' microstructure	38
3.2.1. Defect structures in crystalline matter	38
3.2.2. Size effects in nanocrystalline materials	40
3.3. Particle breakage	43
3.3.1. General considerations	43
3.3.2. Breakage theories	46
3.3.3. Fracture along the length scales	48
4. Experimental Section	51
4.1. Experimental setup	51
4.1.1. Comminution in LabStar LS1	51
4.1.2. Delamination in Batch Mill PE 075	53
4.1.3. Dry grinding in a planetary ball mill	54



4.2. Materials and methods	54
4.2.1. Materials	54
4.2.2. Characterization methods and sample preparation . .	56
5. Breakage Behavior of Nanoparticles	61
5.1. The apparent and true grinding limit	61
5.2. The breakage behavior of tin dioxide	64
5.2.1. Evolution of external structure	64
5.2.2. Evolution of internal structure	68
5.2.3. TEM studies of SnO ₂	72
5.2.4. Breakage mechanism of tin dioxide	77
5.3. Influence of feed material	80
5.4. Influence of process conditions	82
5.4.1. Influence of stress energy	82
5.4.2. Breakage mechanisms at different SE	86
5.4.3. Influence of grinding media shape	89
5.4.4. Influence of suspension viscosity	91
5.4.5. Influence of suspension stability	94
5.4.6. Influence of process temperature	95
5.4.7. Conclusion of process variations	97
5.5. Breakage behavior of various inorganic materials	98
5.5.1. Milling behavior of zirconia and alumina	98
5.5.2. Comparison of different materials	105
5.5.3. Grinding limit as a result of machine limitation . . .	108
5.5.4. Phase transition during grinding	109
5.6. Scale-up of nanomilling	111
5.7. The limit in dry grinding processes	114
6. Delamination of Graphite	121
6.1. Breakage behavior of graphite	122
6.1.1. Preliminary experiments	122
6.1.2. Mechanism of delamination	125
6.2. Characterization of delaminated sheets	131
6.3. The role of stress energy	139
6.4. Yield of delaminated sheets	142



Contents

6.5. First examples of application	145
6.5.1. Production of filled polymers	145
6.5.2. Preparation of conductive films	148
6.5.3. Coating of delaminated sheets with platinum nanoparticles	152
7. Conclusion and Outlook	157
Bibliography	160
A. Appendix	173
A.1. Reproducibility of grinding experiments	173
A.2. Comparison between Rietveld and Scherrer evaluation	176
A.3. Micropore analysis of various materials	179
A.4. Coating of delaminated graphite sheets	182