




Thomas Wilhelm Tils (Autor)  
**Design and 3-D Electromagnetic Modeling of  
Terahertz Waveguide Mixers and Components**

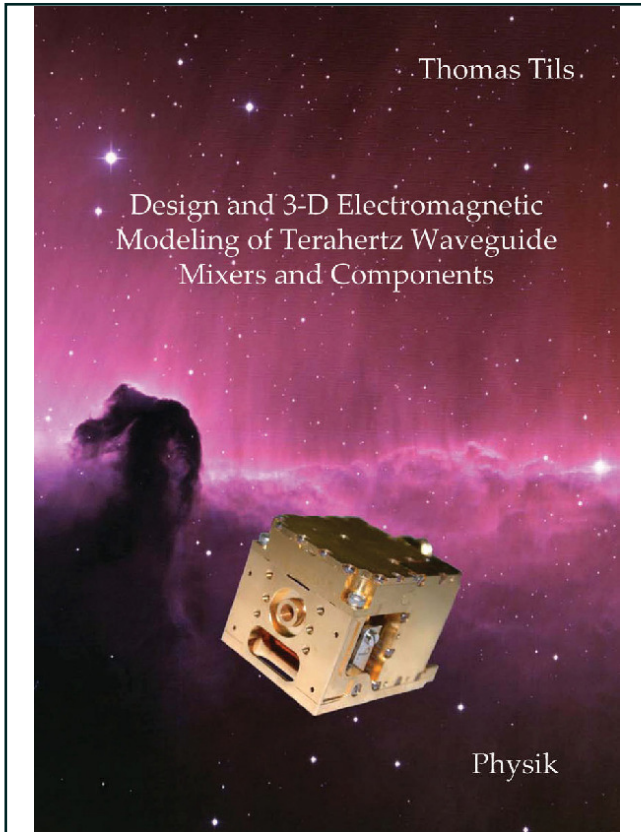

<https://cuvillier.de/de/shop/publications/2152>

Copyright:  
Cuvillier Verlag, Inhaberin Annette Jentsch-Cuvillier, Nonnenstieg 8, 37075 Göttingen,  
Germany  
Telefon: +49 (0)551 54724-0, E-Mail: [info@cuvillier.de](mailto:info@cuvillier.de), Website: <https://cuvillier.de>

# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Submillimeter and Terahertz Astronomy . . . . .	1
1.2	Mixer Technology . . . . .	3
1.3	Heterodyne Projects with Contributions in this Thesis . . . . .	5
1.3.1	HIFI . . . . .	5
1.3.2	GREAT for SOFIA . . . . .	6
1.3.3	CONDOR . . . . .	7
1.3.4	RadioNet . . . . .	8
1.4	Thesis Overview . . . . .	9
<b>2</b>	<b>Theoretical Background</b>	<b>11</b>
2.1	Introduction . . . . .	11
2.2	Heterodyne Receivers . . . . .	11
2.3	Superconducting Mixer Devices . . . . .	14
2.3.1	Superconductor-Insulator-Superconductor (SIS) Mixer . . . . .	15
2.3.2	Superconducting Hot Electron Bolometer Mixer (HEB) . . . . .	17
2.4	Waveguide Theory . . . . .	19
2.4.1	Waveguide Losses . . . . .	22
2.4.2	Split-block Technique . . . . .	24
2.5	Characterization of Microwave Components . . . . .	25
2.5.1	Scattering Matrix . . . . .	25
2.5.2	Impedance Matching . . . . .	26
2.6	Impedance Matching Requirements of Waveguide Mixers . . . . .	27
2.7	Analytical Description of Waveguide Probes . . . . .	29
2.7.1	Double Sided Probe . . . . .	29
2.7.2	Single Sided Probe . . . . .	33
2.7.3	Additional Probe Constraints . . . . .	34
2.8	3-D Electromagnetic Simulation . . . . .	35
2.8.1	The Finite Integration Technique . . . . .	35
2.8.2	Advanced Mesh Strategies . . . . .	38

2.8.3	Ports . . . . .	41
2.8.4	Optimizer . . . . .	41
2.9	Summary . . . . .	42
<b>3</b>	<b>Submillimeter Mixers in Waveguide Technology</b>	<b>43</b>
3.1	Introduction . . . . .	43
3.2	Setup of a Waveguide Mixer . . . . .	46
3.3	Dimensioning of Waveguides and Substrates . . . . .	48
3.4	The Waveguide Probe . . . . .	51
3.5	Low-pass Filter . . . . .	53
3.6	Integrated Matching Circuit of SIS Mixers . . . . .	55
3.7	Design of Waveguide Mixers using 3-D Electromagnetic Simulation Software . . . . .	57
3.7.1	Symmetry Plane . . . . .	58
3.7.2	Port Definition . . . . .	59
3.7.3	Optimization . . . . .	60
3.8	Design Verification through Fourier Transform Spectrometer Measurement . . . . .	62
3.9	HIFI Band 2 Mixer . . . . .	65
3.9.1	Waveguide and Probe . . . . .	66
3.9.2	Substrate and Blocking Filter . . . . .	69
3.9.3	Tolerance Analysis . . . . .	70
3.9.4	Measurements of HIFI Band 2 Flight Mixers . . . . .	76
3.10	345GHz Probe for study within AMSTAR . . . . .	77
3.10.1	Design . . . . .	78
3.11	Superconducting Hot Electron Bolometer Waveguide Mixers . . . . .	81
3.11.1	Design . . . . .	82
3.11.2	Performance . . . . .	84
3.11.3	FTS Measurements . . . . .	85
3.12	SMART Receiver . . . . .	87
3.13	Probe for MIRA . . . . .	89
3.14	Investigation of Surface Roughness of Waveguides . . . . .	89
3.15	Summary . . . . .	93
<b>4</b>	<b>Waveguide Horn Antennas</b>	<b>95</b>
4.1	Introduction . . . . .	95
4.2	Definitions . . . . .	96
4.2.1	Coordinate System . . . . .	96
4.2.2	Cross-polarization . . . . .	98
4.2.3	Far-field . . . . .	99
4.2.4	Phase Center . . . . .	99

4.2.5	Directivity . . . . .	100
4.2.6	Quasioptics . . . . .	100
4.3	Design . . . . .	101
4.3.1	Types of Feed Horns . . . . .	102
4.3.2	Single Mode Horns . . . . .	104
4.3.3	Multiple Mode Horns . . . . .	104
4.3.4	Mode Matching Simulation Method . . . . .	107
4.3.5	3-D Electromagnetic Field Simulation . . . . .	108
4.4	Manufacturing . . . . .	109
4.4.1	Manufacturing of the HIFI Band 2 Horns . . . . .	110
4.4.2	Qualification Process of the HIFI Band 2 Feed Horn . . . . .	111
4.5	Phase and Amplitude Measurement Setup . . . . .	113
4.5.1	Measurement Method . . . . .	114
4.5.2	Method for Misalignment Determination . . . . .	115
4.5.3	Alignment in Mixer Sub Assembly . . . . .	122
4.6	Characteristics of the Corrugated Horns for HIFI Band 2 . . . . .	124
4.6.1	Beam pattern of HIFI Band 2 Horns . . . . .	124
4.6.2	Visual Inspection - Horns with Defects . . . . .	125
4.7	Beam Pattern Characteristics of the Smooth-Walled Spline-Profile Horn . . . . .	128
4.8	Comparison of Smooth-Walled Horn with the Corrugated HIFI Horn	129
4.9	Summary . . . . .	132
<b>5</b>	<b>2SB Mixer Design</b>	<b>133</b>
5.1	Introduction . . . . .	133
5.2	Functional Description of a Sideband Separation Mixer . . . . .	135
5.2.1	Image Rejection Ratio . . . . .	137
5.3	Technical Realization of the 2SB Mixer . . . . .	138
5.4	Waveguide Components for Advanced Mixer Designs . . . . .	140
5.4.1	Branch-line Waveguide Coupler . . . . .	141
5.4.2	LO Coupler . . . . .	144
5.4.3	Power Splitter . . . . .	147
5.4.4	Waveguide Load . . . . .	149
5.5	Manufacturing of THz Waveguide Components . . . . .	151
5.5.1	Metal Micromilling . . . . .	151
5.5.2	Silicon Micromachining Etch Technique . . . . .	154
5.6	Measurement of the 90° Branch-line Waveguide Coupler at 345GHz	155
5.6.1	Measurement Setup . . . . .	156
5.6.2	Measurement Procedure . . . . .	156
5.6.3	Verification of the Accuracy of the Measurement Method . . .	159
5.6.4	First Measurement Series with Misaligned Split-block . . . . .	160

---

5.6.5	Evaluation of the Measurement Results . . . . .	162
5.7	Summary . . . . .	167
<b>6</b>	<b>Outlook and Future Work</b>	<b>169</b>
<b>A</b>	<b>Appendix</b>	<b>175</b>
A.1	Probe Dimensions . . . . .	175
A.2	Horn Manufacturing Process . . . . .	181
A.3	Horn Beam Patterns . . . . .	181
A.4	Waveguide Coupler Measurement Procedure . . . . .	190